



- **Features**
- Input voltage: 176-305VAC
 - Built-in active PFC function: 0.98Typ.
 - Low THD: 10% Typ.
 - High efficiency: 90% Typ.
 - Waterproof (IP67)
 - Constant Current / 0-10V Dimming / Clock Dimming(CLK)/PWM Dimming
 - Protection: OVP, SCP, OTP
 - Full Power at 65%Iomax~100%Iomax (Constant Power)




■ **Specification**


ME075M105AQ_CP		PN:	
Efficiency(230Vac) ^{Note.1}	90%(Typ.), 88%(Min.)		
Voltage Range (V) ^{Note.2}	176 ~ 305Vac		
Voltage Rated (V) ^{Note.2}	200-240Vac		
Frequency Range (Hz)	47-63		
Power Factor	0.98 (Typical) at 220Vac		
	>0.9 with 70%~100% load, at 220~277Vac		
THD	<15% with 80% ~ 100% load, at 100~277Vac		
	<20% with 50%~100% load, at 100~277Vac		
AC Current(Max)	0.42A MAX at 220VAC		
Inrush Current(Max.)	65A at 230Vac input 25°C Cold Start (time wide=500uS, measured at 50% Ipeak,Not applicable for the inrush current to Noise Filter for less than 0.2ms)		
Leakage Current(Max.)	0.75mA at 277Vac/60Hz		
Output	Rated Output Voltage (V)	108-72	
	Output Voltage range (V)	43-108	
	Rated Current(mA)	700-1050	
	Output Current Range(mA)	70-1050	
	Rated Power (W)	75(max)	
	Output Current Set Range	6.5%Io_max~100%Io_max	
	Constant Power Output Set Range	65%Io_max~100%Io_max	
	Ripple Current	<10%((PK-AV)/AV) full load)	
	Current Tolerance	5%	
	Line Regulation	1%	
	Load Regulation	3%	
	Turn on delay Time	0.5s(typ.), measured at 220Vac input	
	Protection	Over Voltage(V)	<130 Protection type: Voltage limiting.output will not exceed the upper limit voltage , recovers automatically after fault condition is removed.
Over Current		-	
Short Circuit		Protection type: Hiccup mode. recovers automatically after short is removed.	
Over temperature		Protection type: Resumable mode.when the inside temperature of PSU rise to 100°C(Typ.), the PSU will shutdown.The power supply should resume its normal operation when the inside temperature of PSU drop to normal temperature.	
Environment	Operating Temp.	-40~+70°C(Refer to 'Derating Curve')	
	Tc	90°C max	
	Operating Humidity	20~95% RH non-condensing	
	Storage Temp., Humidity	-40~+85°C , 10-95%RH	
	Temp. Coefficient	0.03%/°C (0~50°C)	
Safety & EMC	Vibration	10-500Hz,5G 12min/cycle , period for 72min each along X、Y、Z axes	
	Safety Standard	UL8750;UL1012;CAN/CSA-C22.2 No.107-01;IEC/EN61347-1;IEC/EN61347-2-13;	
	Withstand Voltage	I/P-O/P:3.75KVAC I/P-FG:1.875KV O/P-FG:1.5KV	
	Isolation Resistance	I/P-O/P:100M Ohms (500VDC/25°C/70%RH)	
	EMC Emission	EN55015, EN61000-3-2 Class C, EN61000-3-3	
Others	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge L,N-FG 10KV, L-N 10KV)	
	MTBF	250,000 hours, measured at full load, 25°C ambient temperature MIL-HDBK-217F(25°C)	
	Lifetime	50,000 Hours at Tc 75°C(Refer to"Life Time VS. Tcase (Ref.)")	
	Dimension	173x67.5 x37mm (LxWxH)	
	Weight(Typ.)	0.8kg	

Note.1: Measured at full load and steady-state temperature in 25°C ambient(Efficiency will be about 2% lower if measured immediately after startup); Note. 2: Derating may be needed under low input voltages , Please Refer to 'Derating Curve' ; Note. 3: All parameters NOT specially mentioned are measured at 230VAC input , rated load and 25°C of ambient temperature
subject to change without notice


Derating Curve

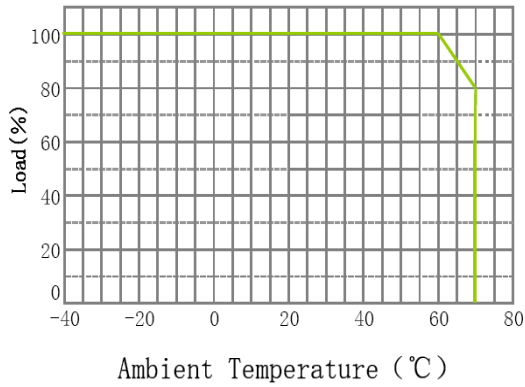


V/I Curve

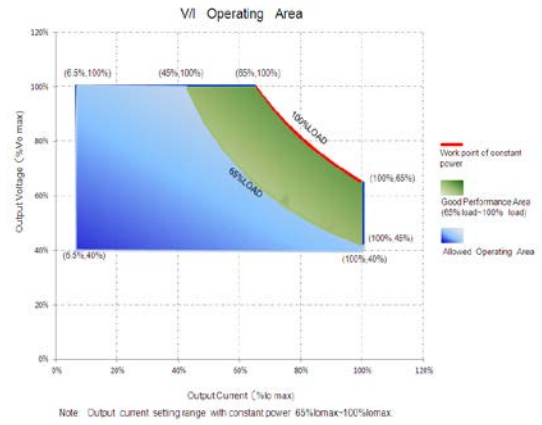


Power Factor VS. Load Curve

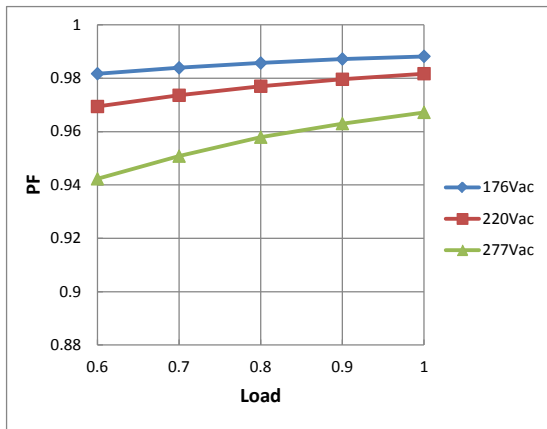


Efficiency VS. Load Curve

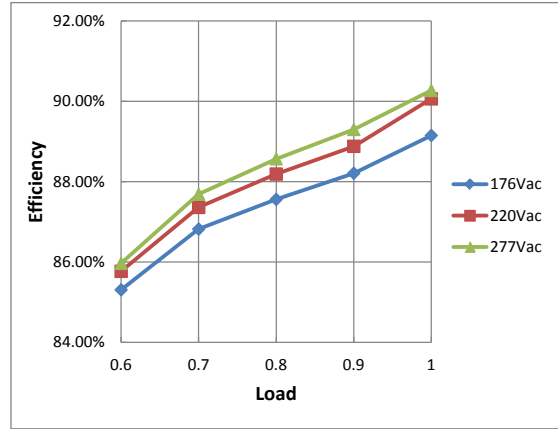

THD Curve

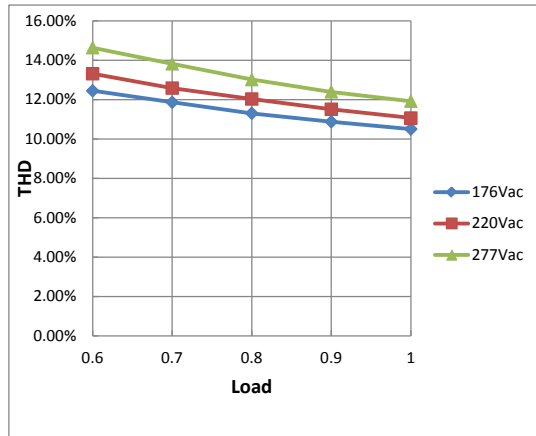


Life Time VS. Tcase (Ref.)

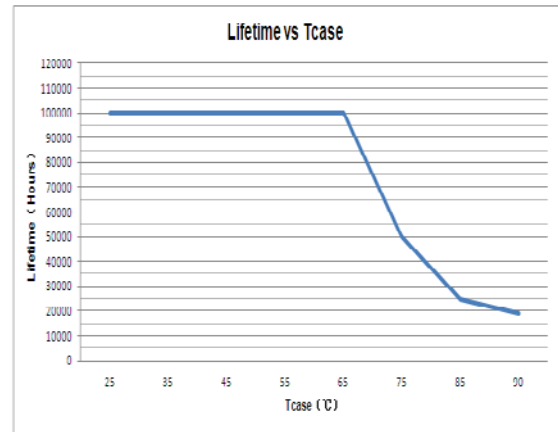

■ **Instruction**

1.Field Programmable Topology

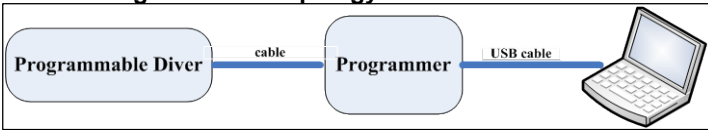

The programmable driver can be programmed by using special PC software and the programmer module.

2.Dimming Interface Description

Pin description

Pin	Name	Value	Description
1	Vaux 12V	10.8V-13.2V	Passive dimmers power supply
2	Dim+/Program	0-10V	Dimming/Programming input
3	Dim-	0V	DC Ground

3.Dimming Software Function Instruction

■ **Adjustable Output Current(AOC)**

Adjustable Output Current(AOC)

Module Current mA

Max Current mA Power W

Users can set the rated current between 7%*Max Current and 100%*Max Current

■ **PWM**

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current.User can set "Positive Logic" or "Negative Logic" of the PWM signal. PWM duty circle: 1%~99%(it has both positive and negative logics), frequency: 500Hz~5kHz, 3V~10V is high,-0.3V~0.8V is low.

■ **Adjustable Startup Time(AST)**

Adjustable Startup Time(AST)

Start Fadeup Time s

Set driver's "Start Fade up Time". It means how much time the driver costs to achieve the "Module Current" that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

Dimming Interface Selection(DIS)

1-10V PWM Smart Midnight ClockDIM Fixed ClockDIM No Dimming

PWM Logic(PWML)


Positive Or Negative Logic

■ **Fade Time(FT)**

Fade Time(FT)

Fadeup Time s

Set driver's "Fade up Time". This function is available in the Smart Midnight ClockDIM and Fixed ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

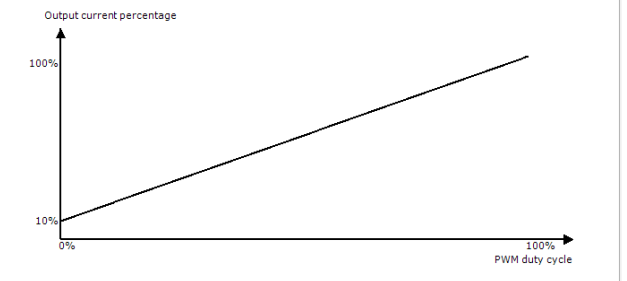

■ **1-10V**

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0-10V signal from 2nd pin of the dimming interface. Default: input ≤1V, output current 10%; input ≥8.5V, output current 100%.

Dimming Interface Selection(DIS)


1-10V PWM Smart Midnight ClockDIM Fixed ClockDIM No Dimming

1-10V Min dim level V %

1-10V Max dim level V %



Instruction

Integrated Dynadimmer

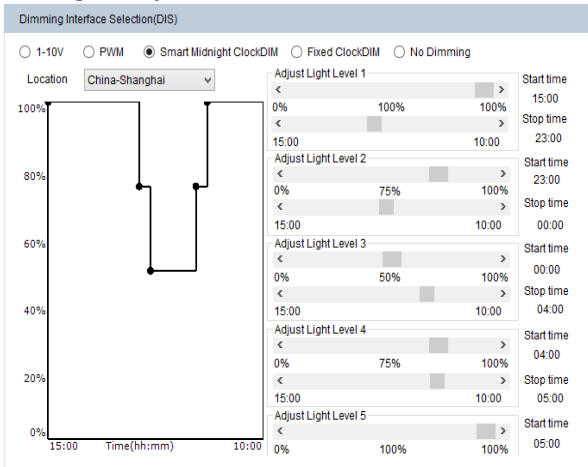


Integrated Dynadimmer allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Integrated Dynadimmer, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ON-time is defined as a period during which the driver operates continuously for ≥ 4 hours to ≤ 24 hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00-10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons.

Constant Light Output(CLO)

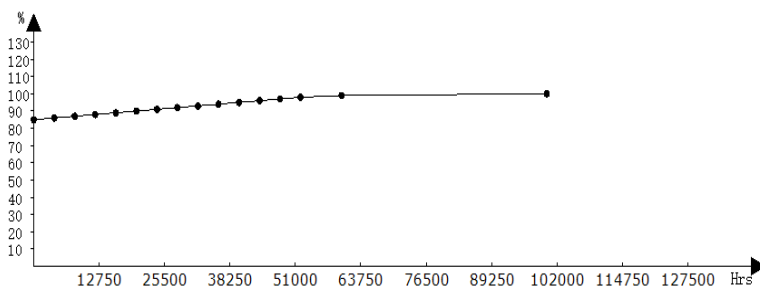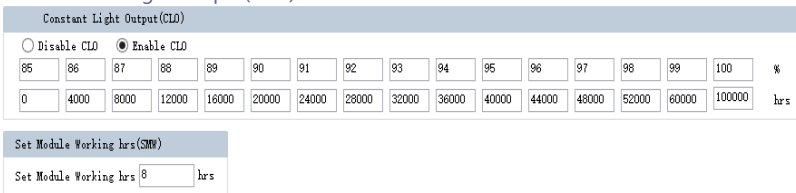

Integrated Dynadimmer Time Based

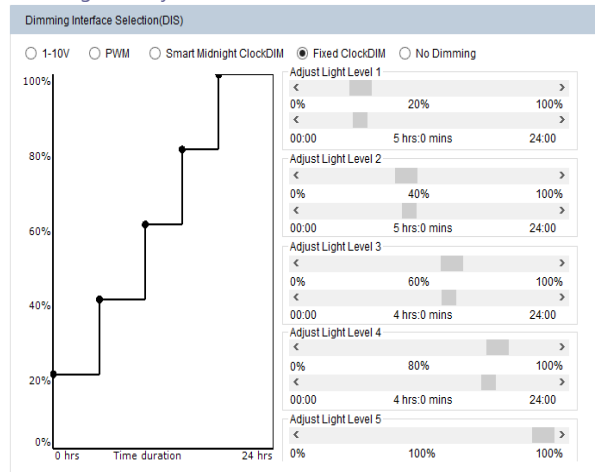


Allow users to separate 24hrs into 5 sections and corresponding output current.

No Dimming



The driver will be in constant output mode.

Set MODULE Working hrs(SMW)




User can check how much time the driver works through this function.

Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO. When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below:
 $\text{Driver target nominal output current} = \text{CLO percentage} * \text{AOC}$
 For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be $0.98 \times 500 = 600 \text{ mA}$. The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set at any value between (0-100,000 hours).



■ Mechanical Specification

Dimensions (Unit: mm)

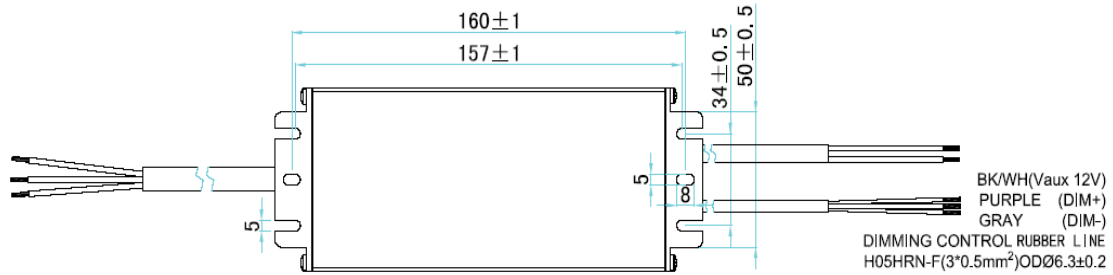

RUBBER LINE CCC 60245 IEC 57 (YZW) /VDE H05RN-F
AC INPUT (3*1.0mm²) OD∅7.3±0.3mm
BROWN/L BLUE/N YE-GN/GND

RUBBER LINE CCC 60245 IEC57 (YZW) /VDE H05RN-F
DC OUTPUT (2*1.0mm²) OD∅6.8±0.3mm
BROWN/V+ BLUE/V-

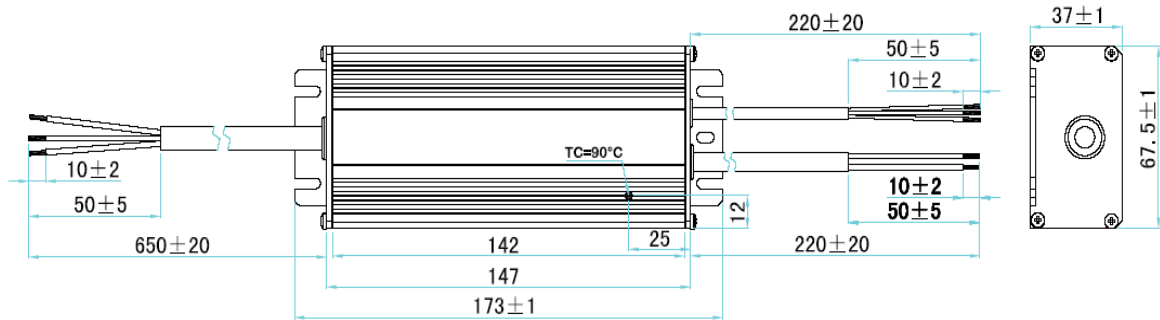

■ Nameç

<ul style="list-style-type: none"> ● AC/L BROWN (棕色) ● AC/N BLUE (蓝色) ● YE-GN (黄绿色) <p>INPUT (输入)</p>	<p>MOONS'</p> <p>LED Driver (LED控制装置) Energy Saving Solutions For LED Module Only</p> <p>Http://www.moons.com.cn Http://www.moonsindustries.com</p> <p>SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD 上海月星自动化控制有限公司 MADE IN CHINA 中国</p>	<p>ME075M105AQ_CP</p> <p>P/N:</p> <p>Input Voltage (输入电压): 200-240Vac 50/60Hz Input Current (输入电流): 0.5A Output Voltage (输出电压): 43-107Vdc Adjustable (自适应) Output Current (输出电流): 1050-700mA Settable (可设定) Output Voltage (输出电压): 119Vdc Max</p>	<p>CCC, CE, RoHS, SELV, F, 110, 25</p> <p>Output Current (输出电流): 1050mA Max Output Power (输出功率): 75W tc:90°C ta:60°C PF>0.90</p> <p>IP67 RoHS SELV</p>	<p>DIMMING (调光)</p> <p>Vaux 12V/ BK/WH (黑白) Dim+ Program /PU (蓝色) Dim- /GR (灰色)</p> <p>OUTPUT (输出)</p> <p>V- BLUE (蓝色) V+ BROWN (棕色)</p>
---	--	--	---	--

RoHS Compliance:

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.