



North American Products



Normal motion detecting



Daylight threshold




5 Year Guarantee
5 Year Guarantee

MC031V IP65 Microwave Motion Sensor For Warehouse




FC IP65



High bay & low bay

Linear & batten


Detection Pattern (max / min)



Detection area*

100%	3.5m	4.5m
50%	2m	3m

*These data were tested by a 165cm height person and his walking speed is 1m/s.

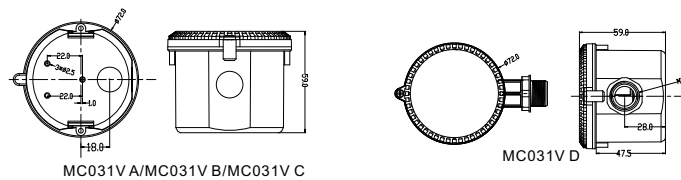

SPECIFICATIONS

Operating voltage	120/277Vac,50/60Hz
Rated Load	120Vac 4A electronic/magnetic ballast 277Vac 3A electronic/magnetic ballast
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	≤ 1W(stand-by)
Detection Area(Radius)	8m
Max. Mounting height	15m
Hold time	5s/30s/90s/3min/20min/30min
Stand-by Period	5s/5min/10min/30min/60min/+∞
Stand-by DIM Level	Sensor: 10%/20%/30%/50%
Daylight sensor	Sensor: 50lux/100lux/200lux/disable
Operating temperature	-35℃ ~55℃
IP rating	IP65

