
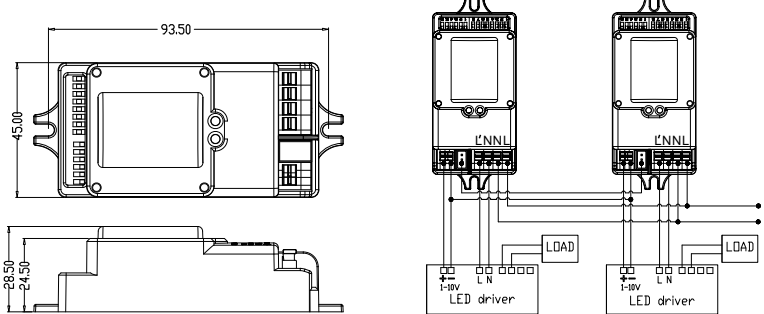


MC049V

Dimming Function / Enhanced detection zone

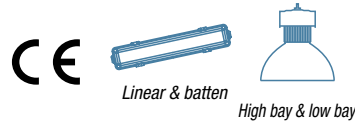


SPECIFICATIONS

Operating voltage	220~240Vac
Rated Load	800W(Inductive), 1200W (Resistive)
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	≤0.5W(stand-by)
Detection Area(Radius)	8m Max.
Max. Mounting height	12m
Hold time	5s/30s/90s/3min/20min/+∞
Stand-by Period	0s/5s/5min/10min/30min/1h/+∞
Stand-by DIM Level	10%/20%/30%/50%
Daylight sensor	2lux/5lux/10lux/25lux /50lux/100lux/Disable
Operating temperature	-35℃ ~ 70℃
IP rating	IP20




SYNC

Master-slavtie control



Step dimming



Normal motion detecting




Daylight threshold

5 Year Guarantee

5 Year Guarantee

Dimming Function

Detection Pattern (max / min)



Detection area *

100%	2m	3.5m
75 %	1m	2m
50 %	0.5m	1.5m
10%	0m	0.5m

*These data were tested by a 165cm height person and his walking speed is 1m/s.